


# MS17/26ECP-17

## Product summary:

DiSEqC multiswitch with external power supply, passive terr. input

## Brief description:

17in/26out standalone multiswitch for distribution of 16 SAT IF signals including passive terrestrial for up to 26 users. The multiswitch is DC supplied from connected satellite receivers, DC2.1 socket for external power is connected to all satellite inputs. Power supply PA12 2A is included in the package.

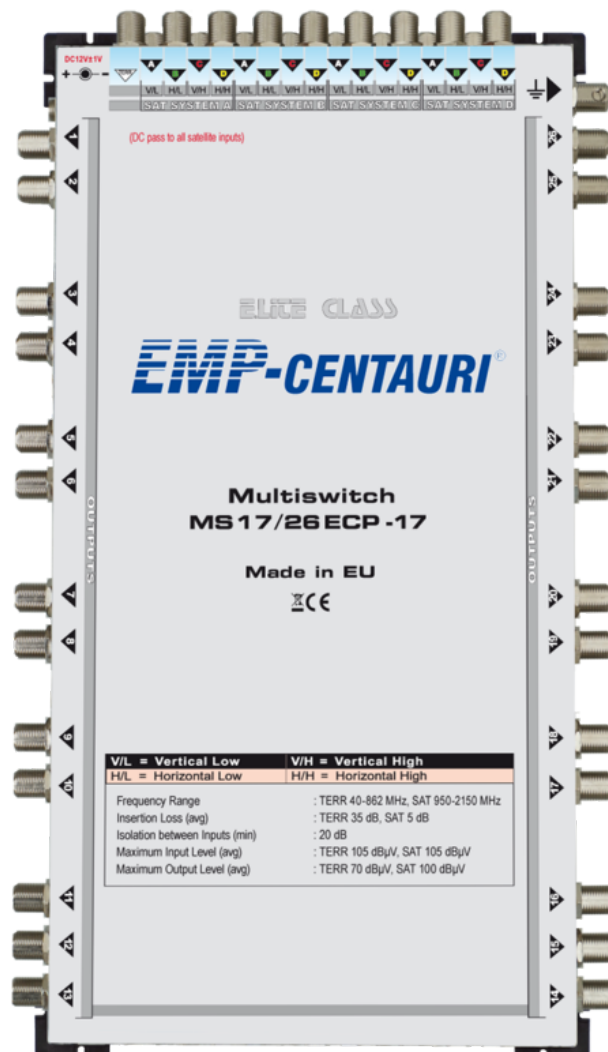

## Technical data:

| Parameter             | Condition                 | Value                     |
|-----------------------|---------------------------|---------------------------|
| Frequency range       | Sat. inputs               | 950-2150 MHz              |
|                       | Terr. input               | 40-862 MHz,               |
|                       | Outputs                   | 40-2150 MHz,              |
| Control               |                           | DiSEqC 1.0 (2.0) commands |
| Insertion loss        | Sat.                      | 5 dB avg.                 |
|                       | Terr.                     | 35 dB avg.                |
| Sat. inputs isolation | Between V/H polarisations | 20 dB min                 |
|                       | Between low/high bands    | 25 dB min                 |
|                       | Between sat. systems      | 25 dB min                 |
| Maximum input level*  | Sat.                      | 105 dBμV avg              |
|                       | Terr.                     | 105 dBμV avg,             |
| Maximum output level* | Sat.                      | 100 dBμV avg              |
|                       | Terr.                     | 70 dBμV avg               |
| Power consumption     | From each receiver        | 100 mA (18 V)             |

Postal address: EMP-Centauri s.p.a. - 5. květen 690 - 339 01 Kladno - Czech Republic

Management: Tel.: +420 376 323 813 Tel.: +420 603 497 419 E-mail: info@emp-centauri.cz

Sales department: Tel.: +420 376 323 813 Tel.: +420 603 497 419 Tel.: +420 776 619 976 (EN) Tel.: +420 778 066 654 (CZ) E-mail: sales@emp-centauri.cz

Purchase department: E-mail: purchase@emp-centauri.cz

Technical support: Tel.: +420 376 323 853 (during workhours) Hotline: +420 603 497 419 (available anytime) E-mail:

support@emp-centauri.cz Skype ID : live:.cid.624e3941fb5334d9

|                    |                    |
|--------------------|--------------------|
| Dimensions (w,d,h) | 18.6 x 33 x 5.1 cm |
| Temperature range  | -25 ~ +60 °C       |
| Weight             | 1.500 kg           |

\*Terr.: EN 50083-3/60dB IMA3 [dBμV]; SAT: EN 50083-3/35dB IMA3 [dBμV]